

Metal Working Fluid

Slugger
BY JANCY ENGINEERING USA

Holemaker
QUALITY EUROPEAN MADE MAGNETIC DRILLING MACHINES

Slugger Metal Working Fluid

**HEAVY DUTY MINERAL
BASED WATER SOLUBLE**

- Formulated to extend tool life and improve surface finish
- Contains Corrosion Inhibitors to protect machine parts
- High resistance to bacterial & fungal growth
- Suitable for use with Slugger Cutters & all other metal cutting, drilling & milling applications on ferrous and non ferrous metals



Part Number	Description
SPFLUID	500ml Metal Working Fluid
SPFLUID1	1litre Metal Working Fluid
SPFLUID5	5ltr Metal Working Fluid
SPFLUID20	20ltr Drum with provision to fit tap

MSDS are Available on our website - www.industrialtool.com.au

Recommended mix rate for general drilling:

One part cutting fluid to eight parts water

- add cutting fluid to water, not water to cutting fluid

Pressure Feed Coolant Bottle

The Pressure Feed Coolant Bottle connects directly to any magnetic drilling machine with a through spindle coolant system, making it possible to apply cutting fluid to the centre of the cut when drilling vertically. Also suitable for applications where a large amount of fluid is required - ie. Large Diameter/Deep cutting, or very hard material.



Part Number	Description
SA-WPB	Pressure Feed Coolant Bottle, 1100ml To Suit Slugger Drills



Tap Magic Metal Working Fluid EP-XTRA

TAP MAGIC EP-XTRA is highly effective for all cutting operations on all Metals.

You will especially appreciate the performance of this cutting fluid on hard metals and with difficult extreme-pressure cuts of long duration. You will also note dramatic improvements in tool life.



Part Number	Description
TAP10004E	125ml Sprout Top Can - Ctn 24
TAP10016E	472ml Sprout Top Can - Ctn 12
TAP10125E	125ml Plastic Bottle
TAP10500E	500ml Plastic Bottle
TAP11000E	1 litre Plastic Bottle
TAP15000E	5 litre Plastic Bottle
TAP120000E	20 litre Drum with provision to fit tap

Tap Magic ALUMINIUM

Tap Magic® Aluminum is a professional-quality cutting fluid that's specially engineered for cutting and machining operations on aluminum and other non-ferrous metals. This is absolutely the most effective cutting fluid you can use for working with aluminum. Drilling, tapping, sawing... regardless of the cut, you'll enjoy superior performance, superb precision, and a beautiful microfine finish. Tap Magic Aluminum dissipates heat rapidly and provides closer tolerances. It also helps promote longer tool life.



Part Number	Description
TAP20004A	125ml Sprout Top Can - Ctn Qty 24
TAP20016A	472ml Sprout Top Can - Ctn Qty 12

Tap Magic XTRA-THICK

While Tap Magic XTRA-THICK is highly effective for any cut on any metal, it is without equal when making cuts of long duration on the hardest metals such as inconel, titanium, stainless and other hardened steels. In fact, it's highly effective on any metal up to 45 RC! Tap Magic XTRA-THICK contains the proprietary EP-X3 additive for a performance boost. It virtually eliminates work hardening. And it has an extended cling time – so it stays with the tool and work piece longer for deep hole cuts.



Part Number	Description
TAP70016E	472ml - Ctn Qty 12

MSDS are Available on our website - www.industrialtool.com.au

Magnetic Drilling Machine Accessories

Slugger
BY JANCY ENGINEERING USA

Holemaker
QUALITY EUROPEAN MADE MAGNETIC DRILLING MACHINES

Our Large Range Of Magnetic Drilling Machine Accessories Enable The Most Diverse Range Of Jobs To Be Completed Successfully!



Industrial Arbors

- Designed to adapt conventional machines, drill presses, lathes, milling machines etc to accept Slugger Cutters
- Coolant inducer provides coolant feed through to the centre of the cutter



Part Number	Description
SAIA2S	No. 2 Morse Taper with coolant inducer to suit 3/4" Shank Cutters 50mm Max DOC
SAIA3S	No. 3 Morse Taper with coolant inducer to suit 3/4" Shank Cutters 50mm Max DOC
SAIA3S-100	No. 3 Morse Taper with coolant inducer to suit 3/4" Shank Cutters 100mm Max DOC
SAIA3SW	No. 3 Morse Taper with coolant inducer to suit 1-1/4" Shank Cutters 50mm Max DOC
SAIA3SW-100	No. 3 Morse Taper with coolant inducer to suit 1-1/4" Shank Cutters 100mm Max DOC
SAIA4S	No. 4 Morse Taper with coolant inducer to suit 3/4" Shank Cutters 50mm Max DOC
SAIA4S-100	No. 4 Morse Taper with coolant inducer to suit 3/4" Shank Cutters 100mm Max DOC
SAIA4SW	No. 4 Morse Taper with coolant inducer to suit 1-1/4" Shank Cutters 50mm Max DOC
SAIA4SW-100	No. 4 Morse Taper with coolant inducer to suit 1-1/4" Shank Cutters 100mm Max DOC

Quick Grip Arbors


These Quick Grip Arbors offer a tool-less approach to holding Slugger Cutters in place.



Part Number	Description
SAQCA-2MT	No 2 Morse Taper with coolant inducer to suit 3/4" Shank Cutters 50mm Max DOC
SAQCA-3MT	No 3 Morse Taper with coolant inducer t/s 3/4" Shank Cutters 50mm Max DOC

Extension Arbors

- An extension arbor allows greater depths to be reached with your Slugger or Unika Cutters
- All arbor extensions are 33.4mm diameter thus minimum through hole diameter is 34mm

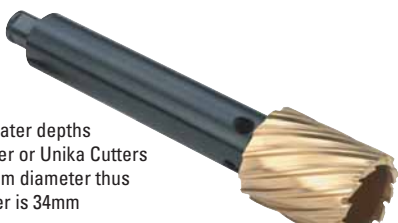

Part Number	Description
SAE025-6	25mm Extension Arbor t/s 6.35mm Dia. Pilot Pin
SAE050-6	50mm Extension Arbor t/s 6.35mm Dia. Pilot Pin
SAE075-6	75mm Extension Arbor t/s 6.35mm Dia. Pilot Pin
SAE100-6	100mm Extension Arbor t/s 6.35mm Dia. Pilot Pin
SAE025-8	25mm Extension Arbor t/s 8mm Dia. Pilot Pin
SAE050-8	50mm Extension Arbor t/s 8mm Dia. Pilot Pin
SAE075-8	75mm Extension Arbor t/s 8mm Dia. Pilot Pin
SAE100-8	100mm Extension Arbor t/s 8mm Dia. Pilot Pin
SAE050B	50mm Extension Arbor t/s 8mm Pin & 1-1/4" Shank
SAE100B	100mm Extension Arbor t/s 8mm Pin & 1-1/4" Shank

Drill Chuck & Adaptors

- Adapt your Slugger Machine to use standard straight shank twist drills



Part Number	Description
SA10215-14	13mm Drill Chuck & Adaptor HD t/s JM101
SA70102	13mm Drill Chuck & Adaptor HD t/s HM35 / HM40
SA10215-34	19mm Drill Chuck & Adaptor HD t/s USA5000
SA20102	13mm Drill Chuck & Arbor HD t/s SM2X2-MT2 / HM50
SA3344	19mm Drill Chuck & Arbor HD t/s SM3X3 and SM4X4
SADCA	Drill Chuck Adaptor, 19mm Universal Shank To 1/2"-20 Thread
DC11506-1	Drill Chuck 13mm, 1/2"-20 Thread Mount, To Suit SADCA

Tapping Head

- Reversible • Ball Clutch
- Depth Control • Axial Float
- Compression/Tension Float



Part Number	Description
SPTH102	3-12mm Tapping Head with #3 MT
SPTH103	8-20mm Tapping Head with #3 MT

Magnetic Drilling Machine Accessories



Pilot Pins

Part Number	Description
SP16001	4.7mm t/s 12-14mm & 7/16 - 1/2" Short Series Cutters (25mm DOC)
SP16002	4.7mm t/s 12-14mm & 27/64 - 17/32" Long Series Cutters (50mm DOC)
SP16003	6.35mm t/s 15-52mm & 9/16 - 2 1/2" Short Series Cutters (25mm DOC)
SP16004	6.35mm t/s 15-52mm & 9/16 - 2 1/2" Long Series Cutters (50mm DOC)
SP16005	6.35mm t/s 19-52mm & 1" - 2 1/2" Extra Long Cutters (75mm DOC)
SP16008	6.35mm t/s 1-1/4" Shank Cutters (50mm DOC)
SP18050	8.0mm t/s Max50 Cutters (50mm DOC)
SP18075	8.0mm t/s Max75 Cutters (75mm DOC)
SP18100	8.0mm t/s Max100 Cutters (100mm DOC)

2 Piece Pilot Pins



The depth of cut restrictions for a magnetic drilling machine using slugger cutters is limited by the ability of the machines arbor to retract the pilot pin within itself. These two part pilot pins allow the depth of cut capacity to be increased. ie. a machine that is standardly limited to 52mm Depth Of Cut can be increased to 75, 100 or 125mm Depth of cut. A depth of cut capacity will still be limited by stroke.

Part Number	Description
SP20001	8mm 2 Piece, To Suit 75mm Long TCT Cutters
SP20003	8mm 2 Piece, To Suit 100mm Long TCT Cutters
SP20005	8mm 2 Piece, To Suit 125mm Long TCT Cutters

Pilot Pins To Suit Extension Arbors

Part Number	Description
SP16010	100mm Pilot Pin to suit Extension Arbor (6.35mm Dia.)
SP16011	125mm Pilot Pin to suit Extension Arbor (6.35mm Dia.)
SP16012	150mm Pilot Pin to suit Extension Arbor (6.35mm Dia.)
SP16013	175mm Pilot Pin to suit Extension Arbor (6.35mm Dia.)
SP18125	125mm Pilot Pin to suit Extension Arbor (8mm Dia.)
SP18150	150mm Pilot Pin to suit Extension Arbor (8mm Dia.)
SP18175	175mm Pilot Pin to suit Extension Arbor (8mm Dia.)
SP18200	200mm Pilot Pin to suit Extension Arbor (8mm Dia.)

Pilot Pin Selection Chart

Use Chart Below to Determine The Correct Pin For Use With Your Extension Arbor

6.35mm Pin	EXTENSION ARBOUR LENGTH			
	25mm	50mm	75mm	100mm
25mm D.O.C	SP16004	SP16005	SP16010	SP16011
50mm D.O.C	SP16005	SP16010	SP16011	SP16012
75mm D.O.C	SP16010	SP16011	SP16012	SP16013
8.0mm Pin				
25mm D.O.C	SP18050	SP18075	SP18100	SP18125
50mm D.O.C	SP18075	SP18100	SP18125	SP18150
75mm D.O.C	SP18100	SP18125	SP18150	SP18175
100mm D.O.C	SP18125	SP18150	SP18175	SP18200



Pipe Attachment

Adapt your Slugger Machine to use on pipe.
Can be used on any ferrous & non-ferrous materials.

Part Number	Description
SAPA-1	For HM30 / HM35 / HM40 / HM50 / SM2X2-MT2 Suit pipe 80mm to 250mm dia. Single chain type Maximum Base Dimensions 95 x 204mm
SAPA-2	For USA5000EX / SM3X3 / SM4X4 Suit pipe 80mm to 250mm dia. Double chain type Maximum Base Dimensions 130 x 254mm

Vacuum Pad

Adapt your Slugger Machine to use on Non-Ferrous Materials.



Part Number	Description
DM110SP	Vac Pad for use with magnetic drill - L: 400mm W: 153mm H: 100mm - Supply min AIR: 2.0CFM @ 85psi - Surface does not have to be smooth, imperfections up to 3.0mm - Surface holding power is 3383N-m

Magnetic Clean Up Tools



MB-01



MB-15

Part Number	Description
MB-01	Magnetic Wand. Stainless Steel Construction Lifting capacity: 6kg
MB-15	Magnetic Broom Wheels & adjustable handle, Lifting capacity: 9kg

High Speed Steel Cutters




Highest Quality Genuine American Made Sluggger Cutters
For use with Sluggger & Holemaker Magnetic Drilling Machines
& other suitable Magnetic Drilling Machines

FEATURES

- Made from the highest grade M2 Steel
& produced on ultra modern CNC machinery
- Manufactured to exceed AISI / ASTM standards
- Fully ground with internal relief
- Drill unique and curved surfaces
- Produce reamed quality burr-free holes
- Allow overlap cuts on existing holes
- 7/16 - 9/16 & 12 - 14mm Diameter Cutters use a smaller diameter pilot pin to maintain cutter wall thickness & ensure strong cutters in these smaller sizes.

NOTE: For increased performance from Sluggger Cutters, use with Sluggger Cutting Fluid. See Page 9.



Metric

	25mm DEPTH	50mm DEPTH	75mm DEPTH
Diameter	Part No.	Part No.	Part No.
12mm	SC1225	SC1250	-
13mm	SC1325	SC1350	-
14mm	SC1425	SC1450	-
15mm	SC1525	SC1550	-
16mm	SC1625	SC1650	-
16.5mm	SC16.525	SC16.550	-
17mm	SC1725	SC1750	-
18mm	SC1825	SC1850	-
19mm	SC1925	SC1950	SC1975
20mm	SC2025	SC2050	SC2075
21mm	SC2125	SC2150	SC2175
22mm	SC2225	SC2250	SC2275
23mm	SC2325	SC2350	SC2375
24mm	SC2425	SC2450	SC2475
25mm	SC2525	SC2550	SC2575
26mm	SC2625	SC2650	SC2675
27mm	SC2725	SC2750	SC2775
28mm	SC2825	SC2850	SC2875
29mm	SC2925	SC2950	SC2975
30mm	SC3025	SC3050	SC3075
31mm	SC3125	SC3150	SC3175
32mm	SC3225	SC3250	SC3275
33mm	SC3325	SC3350	SC3375
34mm	SC3425	SC3450	SC3475
35mm	SC3525	SC3550	SC3575
36mm	SC3625	SC3650	SC3675
37mm	SC3725	SC3750	SC3775
38mm	SC3825	SC3850	SC3875
39mm	SC3925	SC3950	SC3975
40mm	SC4025	SC4050	SC4075
41mm	SC4125	SC4150	SC4175
42mm	SC4225	SC4250	SC4275
43mm	SC4325	SC4350	SC4375
44mm	SC4425	SC4450	SC4475
45mm	SC4525	SC4550	SC4575
46mm	SC4625	SC4650	SC4675
47mm	SC4725	SC4750	SC4775
48mm	SC4825	SC4850	SC4875
49mm	SC4925	SC4950	SC4975
50mm	SC5025	SC5050	SC5075
51mm	SC5125	SC5150	SC5175
52mm	SC5225	SC5250	SC5275

Imperial

		1" DEPTH	2" DEPTH	3" DEPTH
Diameter	Conversion	Part No.	Part No.	Part No.
27/64"	10.72mm	-	SC27/64X2	-
7/16"	11.11mm	SC7/16X1	SC7/16X2	-
29/64"	11.51mm	-	SC29/64X2	-
31/64"	12.30mm	-	SC31/64X2	-
1/2"	12.70mm	SC1/2X1	SC1/2X2	-
17/32"	13.49mm	-	SC17/32X2	-
9/16"	14.28mm	SC9/16X1	SC9/16X2	-
19/32"	15.08mm	-	SC19/32X2	-
5/8"	15.87mm	SC5/8X1	SC5/8X2	-
21/32"	16.67mm	-	SC21/32X2	-
11/16"	17.46mm	SC11/16X1	SC11/16X2	-
3/4"	19.05mm	SC3/4X1	SC3/4X2	-
49/64"	19.45mm	-	SC49/64X2	-
51/64"	20.24mm	-	SC51/64X2	-
13/16"	20.63mm	SC13/16X1	SC13/16X2	-
7/8"	22.22mm	SC7/8X1	SC7/8X2	-
59/64"	23.42mm	-	SC59/64X2	-
15/16"	23.81mm	SC15/16X1	SC15/16X2	-
1"	25.40mm	SC1X1	SC1X2	SC1X3
1-1/32"	26.19mm	-	SC1-1/32X2	-
1-7/64"	28.18mm	-	SC1-7/64X2	-
1-1/8"	28.57mm	SC1-1/8X1	SC1-1/8X2	-
1-11/64"	29.77mm	-	SC1-11/64X2	-
1-1/4"	31.75mm	SC1-1/4X1	SC1-1/4X2	-
1-5/16"	33.55mm	SC1-5/16X1	SC1-5/16X2	-
1-11/32"	34.13mm	-	SC1-11/32X2	-
1-3/8"	34.92mm	SC1-3/8X1	SC1-3/8X2	SC1-3/8X3
1-27/64"	36.12mm	-	SC1-27/64X2	-
1-1/2"	38.10mm	SC1-1/2X1	SC1-1/2X2	SC1-1/2X3
1-9/16"	39.68mm	SC1-9/16X1	SC1-9/16X2	-
1-5/8"	41.27mm	SC1-5/8X1	SC1-5/8X2	-
1-3/4"	44.45mm	SC1-3/4X1	SC1-3/4X2	-
1-25/32"	45.24mm	-	SC1-25/32X2	-
1-7/8"	47.62mm	SC1-7/8X1	SC1-7/8X2	-
2"	50.80mm	SC2X1	SC2X2	SC2X3
2-1/16"	52.37mm	SC2-1/16X1	SC2-1/16X2	-
2-1/8"	53.97mm	SC2-1/8X1	SC2-1/8X2	-
2-1/4"	57.15mm	SC2-1/4X1	SC2-1/4X2	SC2-1/4X3
2-1/2"	63.50mm	SC2-1/2X1	SC2-1/2X2	SC2-1/2X3

All In-between Imperial Sizes Are Available And Also Sizes Up To 3" Dia.
4" & 6" Depth Of Cut Also Available On Sizes 3/4" - 3" dia. (Ex Usa).

NOTE: Actual Cutting Depth Is Approx 5mm Greater To Allow For Sharpening

NOTE: We are constantly extending our range of cutters. If you do not see the size you require please contact us to see if we have added it to our range.

**PLEASE REFER TO OUR UNIKA T.C.T CUTTERS ON PAGE 15
FOR LARGER DIAMETER & LONGER LENGTH CUTTERS**

Specialty Cutters



Tapping Cutter Sizes Selection Chart


The following chart is to assist in determining available Sluggger Cutters to suit UN taps. All sizes are "suggested sizes" only and may be varied to suit individual requirements.

Tap Size	TPI	Cutter Size	Tap Size	TPI	Cutter Size
1/2" UNC	13	27/64"	1" UNC	8	7/8"
1/2" UNF	20	29/64"	1" UNF	12	59/64"
9/16" UNC	12	31/64"	1-1/8" UNC	7	25mm
9/16" UNF	18	13mm	1-1/8" UNF	12	1"
5/8" UNC	11	17/32"	1-1/4" UNC	7	1-7/64"
5/8" UNF	18	19/32"	1-1/4" UNF	12	1-11/64
11/16" UNS	11	5/8"	1-1/2" UNC	6	1-11/32
3/4" UNC	10	21/32"	1-1/2" UNF	12	1-27/64"
3/4" UNF	16	11/16"	1-3/4" UNC	5	39mm
7/8" UNC	9	49/64"	2" UNC	4.5	1-25/32"
7/8" UNF	14	51/64"			

Cobalt Titanium Nitride Cutters

Cobalt M42 suitable for Hardened Steel up to 350BNH (38HRC) ie: Hard Steels or Steel with 'Hard Spots'

TINI Coating (gold colour) has a hardness of 85HRC and coating thickness of 1-3 microns thus providing a harder surface, and reduced friction, giving longer life.



25mm DEPTH METRIC

Part Number	Diameter
SC1/2X1CTN	1/2"
SC9/16X1CTN	9/16"
SC5/8X1CTN	5/8"
SC3/4X1CTN	3/4"
SC7/8X1CTN	7/8"
SC1X1CTN	1"

Chassis Cutters

AS PER COBALT TITANIUM NITRIDE CUTTERS WITH STACK GRINDING

Stack Grinding allows the cutter to go through 2 or more layers of material in one pass.

These cutters are ideally suited for drilling truck chassis.

NOTE: Stack Grinding can be provided on standard Sluggger Cutters in Metric or Imperial sizes up to 30mm or 1-1/8"

25mm DEPTH METRIC

Part Number	Diameter
SC1/2X1COSG	1/2"
SC9/16X1COSG	9/16"
SC5/8X1COSG	5/8"
SC3/4X1COSG	3/4"
SC7/8X1COSG	7/8"
SC1X1COSG	1"

Sluggger Helpful Tip

Maintain a working knowledge of the material being machined. Different materials require different feed rates, speeds and cutter types.

When drilling hard materials, use of Tap Magic Cutting Fluids will greatly improve Sluggger Cutter performance. In horizontal positions (such as drilling truck chassis) Tap Magic "Extra Thick" is ideal as it adheres to the cutter

Titanium Carbon Nitride Cutters

TICN coating (blue/grey in colour) is harder and tougher than other coating materials.

Consequently it has high resistance to edge chipping and abrasive wear.

TICN coating has a hardness of 90HRC

and a coating thickness of 3 - 5 microns.

Suitable for Abrasive & Difficult Materials.

ie: Stainless Steel, Cast Iron, SI-Aluminium Alloys.



25mm DEPTH 50mm DEPTH METRIC

Part Number	Part Number	Diameter
SC1225TICN	SC1250TICN	12mm
SC1425TICN	SC1450TICN	14mm
SC1625TICN	SC1650TICN	16mm
SC1825TICN	SC1850TICN	18mm
SC2025TICN	SC2050TICN	20mm
SC2225TICN	SC2250TICN	22mm
SC2425TICN	SC2450TICN	24mm
SC2625TICN	SC2650TICN	26mm
SC2825TICN	SC2850TICN	28mm
SC3025TICN	SC3050TICN	30mm
SC3225TICN	SC3250TICN	32mm



Rail Cutters

Tungsten Carbide Tipped Specifically Designed for Drilling Railway Line & Suitable for drilling other hard materials such as wear plate & Bisalloy



25mm DEPTH METRIC

Part Number	Diameter
MAXRAIL2225	22mm
MAXRAIL2625	26mm
MAXRAIL2825	28mm
MAXRAIL3025	30mm
MAXRAIL3225	32mm

Straight Flute T.C.T Cutters

Tungsten Carbide Tipped Cutters Suitable for drilling difficult & harder materials such as stainless steel, wear plate & Bisalloy




25mm DEPTH METRIC

Part Number	Diameter
HMRAIL18	18mm
HMRAIL20	20mm
HMRAIL22	22mm
HMRAIL24	24mm
HMRAIL25	25mm
HMRAIL26	26mm
HMRAIL30	30mm
HMRAIL32	32mm
HMRAIL35	35mm

High Speed Steel Cutter Sets

Slugger
BY JANCY ENGINEERING USA

Holemaker
QUALITY EUROPEAN MADE MAGNETIC DRILLING MACHINES



Slugger 8 Piece Short Series Metric Set

Part Number	Kit Includes	
SCSET-A	1 x SC1425	1 x SC2225
	1 x SC1625	1 x SP16001
	1 x SC1825	1 x SP16003
	1 x SC2025	1 x Cutter Case



Slugger 8 Piece Short Series Imperial Set

Part Number	Kit Includes	
SCSET-E	1 x SC1/2X1	1 x SC1X1
	1 x SC5/8X1	1 x SP16001
	1 x SC3/4X1	1 x SP16003
	1 x SC7/8X1	1 x Cutter Case



Slugger 13 Piece Short Series Metric Set

Part Number	Kit Includes	
SCSET-B	1 x SC1225	1 x SC2025
	1 x SC1325	1 x SC2225
	1 x SC1425	1 x SC2425
	1 x SC1625	1 x SC2625
	1 x SC1725	1 x SP16001
	1 x SC1825	1 x SP16003
		1 x Cutter Case



Slugger 15 Piece Combination Imperial Set

Part Number	Kit Includes		
SCSET-F	1 x SC1/2X1	1 x SC1/2X2	1 x Cutter Case
	1 x SC5/8X1	1 x SC5/8X2	1 x SP16001
	1 x SC3/4X1	1 x SC3/4X2	1 x SP16002
	1 x SC7/8X1	1 x SC7/8X2	1 x SP16003
	1 x SC1X1	1 x SC1X2	1 x SP16004



Slugger 8 Piece Long Series Metric Set

Part Number	Kit Includes	
SCSET-C	1 x SC1450	1 x SC2250
	1 x SC1650	1 x SP16002
	1 x SC1850	1 x SP16004
	1 x SC2050	1 x Cutter Case



Slugger 9 Piece Chassis Cutter Set

Part Number	Kit Includes	
SCSET-COSG	1 x SC1/2X1COSG	1 x SC7/8X1COSG
	1 x SC9/16X1COSG	1 x SC1X1COSG
	1 x SC5/8X1COSG	1 x SP16001
	1 x SC3/4X1COSG	1 x SP16003
		1 x Cutter Case



Slugger 15 Piece Combination Metric Set

Part Number	Kit Includes		
SCSET-D	1 x SC1425	1 x SC1450	1 x Cutter Case
	1 x SC1625	1 x SC1650	1 x SP16001
	1 x SC1825	1 x SC1850	1 x SP16002
	1 x SC2025	1 x SC2050	1 x SP16003
	1 x SC2225	1 x SC2250	1 x SP16004



Slugger 8 Piece TiCN Set

Part Number	Kit Includes	
SCSET-TICN	1 x SC1425TICN	1 x SC2225TICN
	1 x SC1625TICN	1 x SP16001
	1 x SC1825TICN	1 x SP16003
	1 x SC2025TICN	1 x Cutter Case

CUSTOMISED SETS AVAILABLE TO SUIT INDIVIDUAL CUSTOMER REQUIREMENTS.